dyson airblade V


TECHNICAL SPECIFICATION





dyson

SIDE ELEVATION

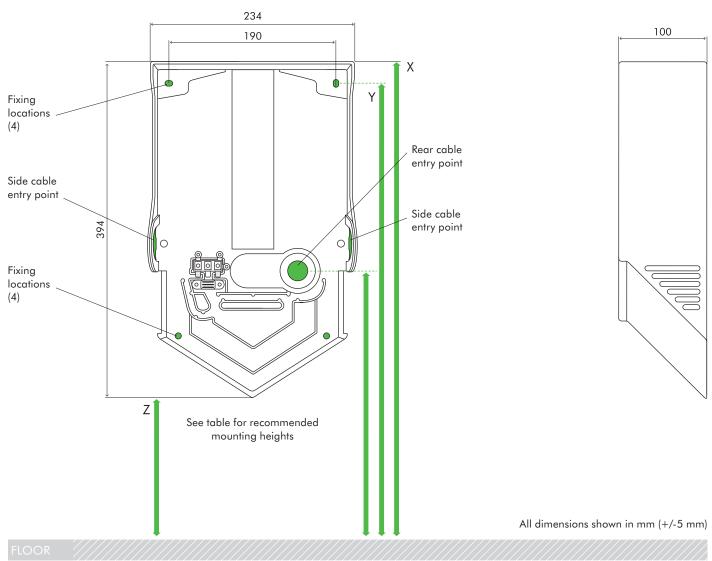

Recommended installation heights from floor						
Male	х	1324 mm	Y	1300 mm	Z	930 mm
Female	Х	1289 mm	Y	1265 mm	z	895 mm
Child or disabled	х	1074 mm	Y	1050 mm	z	680 mm
Child 5-8	Х	952 mm	Y	928 mm	z	558 mm
Child 8-11	Х	1052 mm	Y	1028 mm	Z	658 mm
Child 11-14	Х	1132 mm	Y	1108 mm	z	738 mm
Machine dimensions						
Height 394 mm Width 234 mm	Depth 100	mm				

220 mm clearance either side and 30 mm above machine.
Cable entry point from floor

Male	1089 mm
Female	1054 mm
Child or disabled	839 mm
Child 5-8	717 mm
Child 8-11	817 mm
Child 11-14	897 mm

dyson airblade V



Electrical		
Input voltage/Frequency: 200-240V 50 & 60 Hz		
Standby power consumption: Less then 0.5 W	_	
Motor specification: 1,000 W digital brushless motor	_	
Heater type: None	_	
Construction	_	dus
Fascia: Polycarbonate	_	5
Antibacterial coating type: HU02 (Sprayed Nickel) contains antibacterial additive in paint. HU02 (White) contains antibacterial moulded additive. Can help prevent the growth of bacteria.	_	=
Back plate mounting bracket: ABS/PBT Plastic	_	E
Exterior screw type: Anti-tamper 4 mm Pin-Hex	_	7
Water ingress protection to IP24	_	
Filter		
HEPA filter (Glass fibre and fleece prelayer)		
99.95% of particles captured		
Operation	Product range	
Touch free capacitive sensor activation		
Hand dry time measurement: 12 seconds (Measurement based on NSF Protocol P.335)	Sprayed Nickel	White
Operation lock-out period: 30 seconds		
Airspeed at aperture: 430 mph / 690 km/h		
Maximum altitude: 2,000 metres / 6,561 ft.	dyson	dyson
Logistics		
Net weight: 2.9 kg / 6.17 lbs		
Packaged weight: 4.0 kg / 8.81 lbs		
Packaged dimensions: (H)145 × (W)455 × (D)274 mm / (H)5³/4" × (W)177/8" × (D)10³/4"		

Standard guarantee

5 year guarantee



The Carbon label is a trademark of the Carbon Trust. The NSF logo is the registered trademark of NSF International. Quiet Mark is a registered trademark of the Noise Abatement Society.

